

# Ignite - IP-67 Power-over-Ethernet DATASHEET



### **Part Number**

NWT-POE-DC-24V-M12-IP67

## **Product Description**

Gigabit capable, midspan power over ethernet (PoE) injector design for high reliability military and industrial applications.

#### **Product Overview**


Featuring ruggedized enclosure, overtemperature, over voltage, over current, reverse polarity and short-circuit protection. It supports a wide 11-80VDC input range, useful in stabilizing the power from input sources such as vehicle batteries, which can exhibit varying characteristics due to the sharing of power with other systems, and battery charge and discharge states. It includes a 6 foot 3 pin unterminated DC input power cord and is IP67 Sealed, for outdoor use.

#### **FEATURES**

| 8-80VDC IN                         | Provided for the three pin Amphenol twist lock DC plug at the bottom of the device. |  |  |  |
|------------------------------------|---|--|--|--|
| M12 X-Coded Jack                   | For Data input (DATA)   |  |  |  |
| M12 X-Coded Jack                   | For PoE output (24v Passive PoE)  |  |  |  |
| Amphenol 3-pin Mil-Spec Twist Lock | For DC power input (11-80VDC IN)  |  |  |  |
| M12 L-Coded DC Aux Out             | For powering non-PoE devices at 24V   |  |  |  |
| Power Output                       | 40W   |  |  |  |

## MECHANICAL CHARACTERISTICS

| Dimension | $6.25" \times 3.75" \times 2"$ (to top of connector) 1.5" to top of box. |
|-----------|--|
| Weight    | 2lb 0.1oz  |

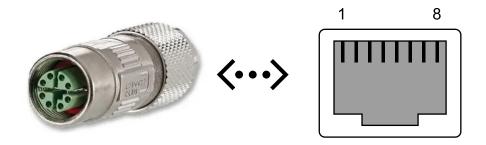

#### **TIA-568B Pinout**

# **COLOR CHART**

| PIN   | 1               | 2      | 3              | 4      | 5             | 6      | 7              | 8      |
|-------|-----------------|--------|----------------|--------|---------------|--------|----------------|--------|
| COLOR | WHITE<br>ORANGE | ORANGE | WHITE<br>GREEN | BLUE   | WHITE<br>BLUE | GREEN  | WHITE<br>BROWN | BROWN  |
| TYPE  | VOUT +          | VOUT + | VOUT -         | VOUT + | VOUT +        | VOUT - | VOUT -         | VOUT - |

# **ACCESSORIES (OPTIONAL)**

Replacement Power Cable: NWT-CBL-PWR-3P-IP67 **DIN-RAIL Mounting Kit:** NWT-BRKT-POE-DIN

© 2024 Northwest Towers, LLC All Rights Reserved.

Although Northwest Towers makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Northwest Towers be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Northwest Towers has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

